



**ED** 1/2 - 2 Ton  
Extended Duty Hoist  
For Special Applications

- Standard lift is 10 feet.
- Totally enclosed, fan-cooled motor for extended operation.
- Highly adaptable for automated plating, heat treating, steel warehouse, foundry, and machine shop use.



**LT** 1/2 - 2 Ton  
Model Trolley  
For CAH Model Air Hoists

- Rated loads from 1/4 to 3 ton in plain and geared models.
- Plain trolley for manual positioning of hoist and load - 1/4 to 3 ton models.
- Geared trolley for more precise positioning of hoist and load. Geared trolleys have standard 9' 6" hand chain drop-1 to 3 ton models



**HT** 1/2 - 2 Ton  
Model Trolley  
For CAH Model Air Hoists

- Rated loads from 1/2 to 2 ton: plain and geared models
- Plain trolley for manual positioning of hoist and load.
- Geared trolley for more precise positioning of hoist and load. Geared trolleys have standard 9' 6" hand chain drop.
- Trolley side plates are all steel for maximum strength.



**MT** 1/4 - 5 Ton  
Motorized Trolley

- Trolley sideplates feature heavy duty bumpers to act as safety lugs and to protect wheels.
- Available to fit wide-flange and patented track beams.
- Single and two-speed motorized models.




**CBT** 1/4 - 5 Ton  
Plain & Geared Trolleys

- Designed to provide superior performance and long, efficient service.
- Wrap-around side plates act as safety lugs and protect wheels.
- Dual tread wheels fit tapered or flat beam flange within range of adjustment. Wheels include permanently lubricated, shielded ball bearings.



**CTA** 1/4 - 5 Ton  
Plain & Geared Trolleys

- Designed for easy operation with minimal effort.
- Wrap-around side plates act as safety lugs and protect wheels.
- Spark and corrosion resistant wheels available. Track clamps available on 1/4 to 4 ton models.



**CYA** 4 - 25 Ton  
Plain & Geared Trolleys

- For rugged, heavy duty service.
- Available to fit wide-flange and patented track beams.
- Equipped with eight sealed Timken tapered roller bearings and grease fittings.



**VT-A** 1/4 - 5 Ton  
Push Type Trolley

- Quick set-up with unique dial fit adjusting collar.
- Fits American Standard beams, wide-flange and patented track beams.
- Hardened wheels and stamped steel side plates.
- Negotiates small radius curves.



**BC** 1 - 10 Ton  
Beam Clamp

- Special clamp jaw design reduces flange stress by distributing load away from flange edge.
- Built-in suspension bar provides lower headroom.



Customize  
with Coffing®

- Bridge Crane Kits
- Jib Cranes
- LodeRail™ Systems
- Chain Containers
- Cord Reels
- Festooning Packages
- Bronze Wheels / Hooks
- Zinc Plated Chain / Hooks
- Variable Speed Control
- Stainless Steel Chain
- NEMA Push Button Stations
- Infrared Remote Control

**CORNERSTONE**  
MATERIAL HANDLING

1-877-611-2644 www.cornerstonematerialhandling.com

**WARNING**

Overloading and Improper Use Can Result In Injury

- To Avoid Injury:
- Do not exceed working load limit, load rating, or capacity.
  - Do not use to lift people or loads over people.
  - Use only alloy chain and attachments for overhead lifting.
  - Read and follow all instructions.

Product Guide

ELECTRIC CHAIN HOISTS | WIRE ROPE HOISTS | AIR POWERED HOISTS | HAND CHAIN HOISTS | RATCHET LEVER HOISTS | TROLLEYS





**EC** 1/4 - 5 Ton

Electric Chain Hoist


- Standard lifts are 10, 15, and 20 feet.
- Hook, lug, plain, geared, and motorized trolley suspensions.
- 5-pocket load sheave improves chain support and reduces wear.
- Overload limiting clutch guards against lifting of damaging overloads.
- Adjustable upper and lower limit switches prevent overtravel.
- Dual-braking system - motor and load brakes.



**JLC** 1/8 - 2 Ton

Electric Chain Hoist

- Standard lifts are 10, 15, and 20 feet.
- Hook, lug, plain, geared, and motorized trolley suspensions.
- Oil bath transmission - gears run longer, quieter.
- Overload limiting clutch guards against lifting of damaging overloads.
- Adjustable upper and lower limit switches prevent overtravel.
- H4 duty cycle. Rated for commercial & industrial applications.

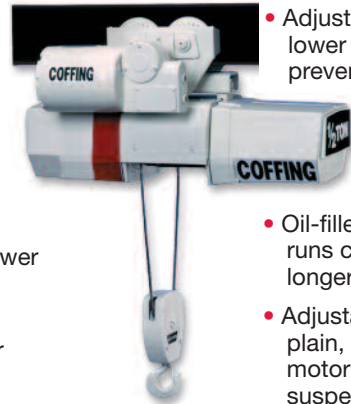

**WR** 1/2 - 5 Ton

Wire Rope Hoist

- Standard lifts to 70 feet.
- Select single or double reeved and low headroom models.
- Adjustable upper and lower limit switches prevent overtravel.
- Oil-filled transmission runs cooler and lasts longer.
- Adjustable lug mount, plain, geared & motorized trolley suspensions.




**EC** 1/4 - 4 Ton

Turnover Hoist

For Special Applications

- Standard lift is 15 feet.
- Heavy-duty, specially modified electric chain hoist with two load hooks.
- Completely inverts virtually any shape load with use of simple slings and successively repositioned load hooks.

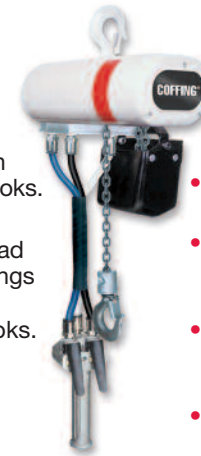

**SLA** 250 - 1000 lb.

Air Powered Hoist

- Standard lift is 10 feet.
- Heavy-duty, lightweight, compact design. Great for commercial and industrial applications.
- Standard protector overload device.
- 10-pocket oblique lay liftwheel provides longer chain life.
- Variable flow, two lever pendant for precise load spotting.
- Industrial duty air motor for tough applications.



**SLC** 250 - 1000 lb.

Electric Chain Hoist

- Standard lift is 10 feet.
- Hook suspension.
- H4 duty cycle.
- Very compact and light weight.
- Standard protector overload device.
- Thermally protected hoist duty motor.
- Epoxy powder coat finish.
- Job proven - industrial and commercial applications.



**YLHA** 1/4 - 6 Ton

Model Hand Chain Hoist

- Travels Easily on curved beams.
- Low headroom provides increased hook travel & maneuverability in tight places.
- Steel construction means hoist and trolley are built for maximum strength.
- Weston type load brake assures positive and efficient load control with minimal maintenance.
- Lifetime Warranty



**AMT** 1/4 - 6 Ton

Model Air Motor Trolley

- Variable speeds up to 50 FPM 1/4 to 1 ton and up to 60 FPM 2 and 3 ton.
- 8-vane motor provides high torque, smooth starting, and excellent control.
- Pendant throttle control provides precise, controlled spotting and efficient load handling.
- Wheels are forged, heat-treated steel, with dual tread for use on Standard or wide flange beams.



**TMM-140A**

140 kg. / 300 lb.

Air Manipulator

- Rotary vane motor provides high, uniform torque for quick response and smooth, quiet operation.
- Self-winding, galvanized wire stores internally.
- Handle-mounted pendant control provides one-handed operation.
- Disc brake secures load.



**LHH** 1/2 - 50 Ton

Hand Chain Hoist

- Standard lifts are 10, 15, and 20 feet.
- Compact and lightweight size allows easy installation and portability.
- Bearing-mounted pinions increase efficiency and ease of operation.
- Through hardened load chain for added strength and wear resistance.
- Economical yet durable.



**EMC** 300 - 500 lb.

**EMW** 500 lb.

Electric Chain / Wire Rope Hoists

- Standard lift is 10 feet.
- Swivel top and bottom hooks w/ safety latches standard.
- Grounded 3-prong plug - easy installation in any std. 115V outlet.
- Compact design
- Upper and lower limit switches.
- Thermal motor protection.
- Light duty operation.



**CAH** 1/2 - 3 Ton\*

Air Powered Hoist

- Standard lift is 10 feet.
- Aluminum housing provides strength and portability.
- 8-vane rotary motor provides high, uniform torque for quick response and smooth, quiet operation.
- Several suspension options available including motorized trolley.
- Spark resistant models.

\* 1/4 - 1 Ton - small frame models



**LSB-B** 3/4 - 6 Ton

Ratchet Lever Hoist

- Standard lifts are 5, 10, 15, and 20 feet.
- Low handle effort.
- Short 360° rotating handle assures precise positioning.
- Optional load limiter available.
- Easy to free chain.
- Steel housing.



**MA & MAL**

3/4 - 6 Ton

Ratchet Lever Hoists

- Standard lift is 5 feet.
- MAL features load limiter - prevents lifting of damaging overload.
- Link chain.
- Aluminum housing.



**PA** 3/4 - 3 Ton

Ratchet Lever Hoist

- Standard lifts are 5, 10, 15, and 20 feet.
- Easy to free chain.
- Short handle with low handle effort.
- Link chain.
- Aluminum housing.



**RA** 3/4 - 6 Ton

Ratchet Lever Hoist


- Standard lift is 5 feet.
- Dual ratchet and pawl design provides easy operation.
- Link chain.
- Aluminum housing.
- Multiple rigging options.



**G Model** 3/4 - 15 Ton

Ratchet Lever Hoist

- Standard lift is 5 feet.
- Single or double-locking pawl models available.
- Can be used to lift or pull.
- Easy operation from either side.
- Roller chain.
- Malleable iron housing.

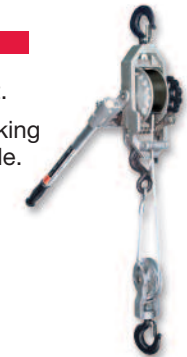

**Cable Hoists**

1/4 - 2 Ton

Ratchet Lever Hoists

- Single and double line.
- Lift heights to 29 feet.
- Reversible handle bends when overloaded.
- Lightweight and rugged.
- 4:1 safety factor meets ANSI Standard B-30.21.